


WE MAGNETISE THE WORLD

## CUSTOM SOLENOID VALVES

### Wetted Isolation Valve

Feature	Specification
Voltage:	• 5-6 VDC Operation
Response Time:	• 10 ms
Operating Pressure:	• 0-350 in./H <sub>2</sub> O (-0.87) Vacuum
Flow:	• 0.01 cfm (0.28 slpm)
Power Consumption:	• Per Customer Specs
Applications / Comments:	<ul style="list-style-type: none"> <li>• Manifold Mount Applications</li> <li>• Chemical Dispensing</li> <li>• Isolated Flow</li> <li>• Operates for years on 2 D cell batteries</li> </ul>

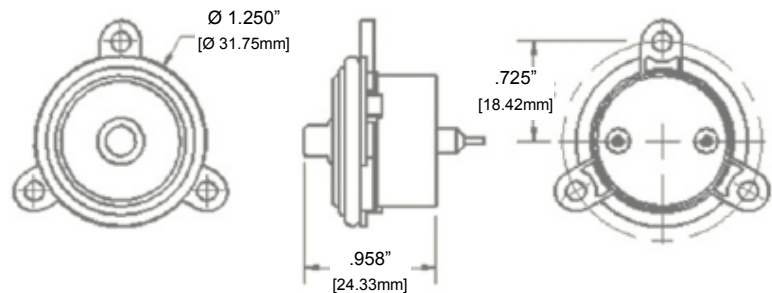

## CONTACT WORLDWIDE

### USA

**Kendrion - Tri-Tech**  
 56733 Magnetic Drive  
 Mishawaka, IN 46545-7481  
 USA

Phone: +1 574 257 2422  
 Fax: +1 574 257 2421  
 E-Mail: [info@tri-techllc.com](mailto:info@tri-techllc.com)

### Europe

**Kendrion Magnettechnik GmbH**  
 August-Fischbach-Straße 1  
 78166 Donaueschingen  
 Germany

Phone: +49 771 8009 3770  
 Fax: +49 771 8009 3634  
 E-Mail: [magnetic-systems@kendrion.com](mailto:magnetic-systems@kendrion.com)

[www.kendrion-tritech.com](http://www.kendrion-tritech.com)  
[www.kendrion-electromagnetic.com](http://www.kendrion-electromagnetic.com)